

#### FEATURES


- High-gloss vitreous china
- Siphon-jet Flushing Action
- 3/4" top inlet spud
- High efficiency-consumption 0.5 gpf / 1.9 lpf
- Integral flushing rim
- Hanging bracket included
- WaterSense® Apporved when used with an approved flush valve
- Flush valve not included
- ADA compliant when installed with max 17" rim height



COLORS:

□ WHITE (130)

#### SPECIFICATIONS

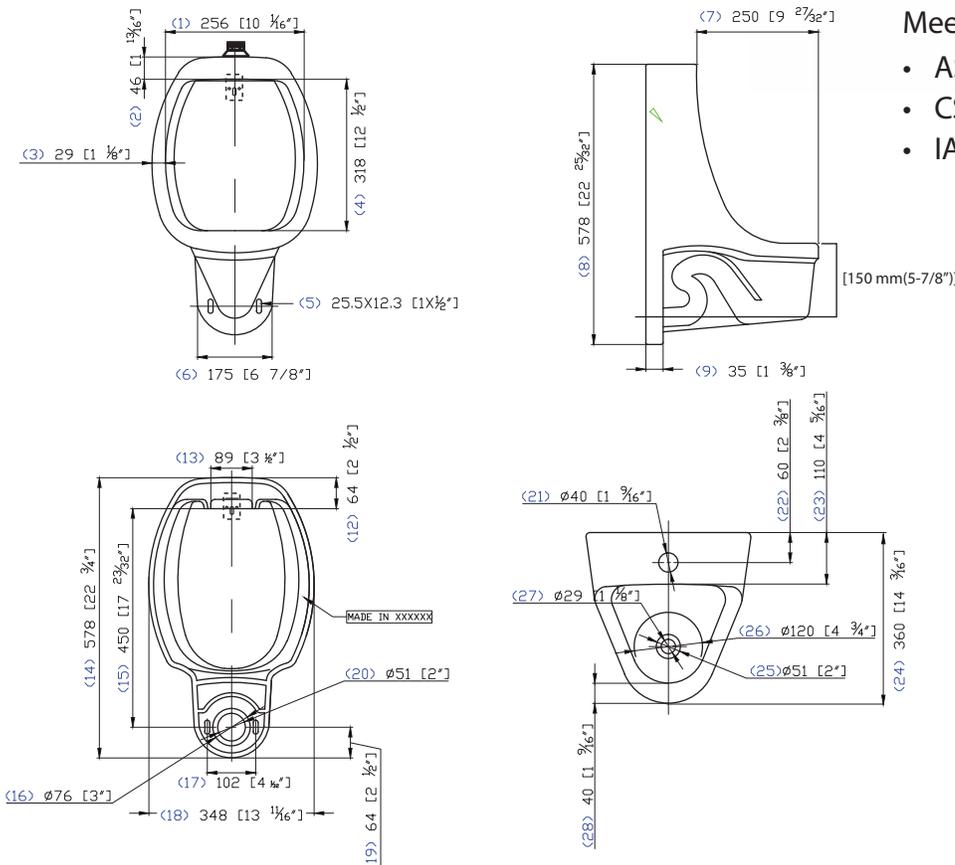

#### CODES & STANDARDS

Meets or exceeds the following:

- ASME A112.19.2
- CSA B45.1
- IAPMO/cUPC



Dimensions may vary (+) or (-) 1/4". Dimensions shown in parentheses are in millimeters: 25.4 mm = 1 inch. Note: Fixture dimensions are nominal and conform with dimension and performance requirements of ASME A112.19.2-2008/CSA B45.1-08 standards. PSI rating: 20 minimum to 80 maximum per ASME A112.19.2-2008/CSA B45.1-08 standards. Dimensions subject to change or cancellation without notice. Briggs is not responsible for the use of superseded or voided specification information.