

# Altima MAX™

Two-piece Standard Round Toilet 4040



### Features

- 1.28 gpf Gravity
- Standard round bowl
- 12” Rough-in
- Color matched trip lever
- 3” flapper
- Fully glazed trapway
- Sanitary bar on bowls for easy cleaning
- Toilet seat not included
- Limited Lifetime Warranty

### Models

4040 Combination:

- 4380

Altima MAX Round front bowl  
Shipping weight: 42 lbs (19 kg)
- 4140

Altima MAX 12” Rough-In tank  
Shipping weight: 32 lbs (14.5 kg)
- 7440

Altima MAX Tank Lid  
Shipping weight: 12 lbs (5.4 kg)

### Optional Tanks:

Right hand, 12” Rough-in (Model 4142)  
Left hand, 10” Rough-in (Model 4144)  
Left hand 14” Rough-in (Model 4145)

### Colors

- ☐ White (130)
- ☐ Biscuit (235)
- ☐ Bone (733)



### Codes & Standards

Meets or exceeds the following:

- ASME A112.19.2
- CSA B45.1
- ICC A117.1-2017
- IAPMO/cUPC




# Altima MAX™

Two-piece Standard Round Toilet 4040



### Specifications

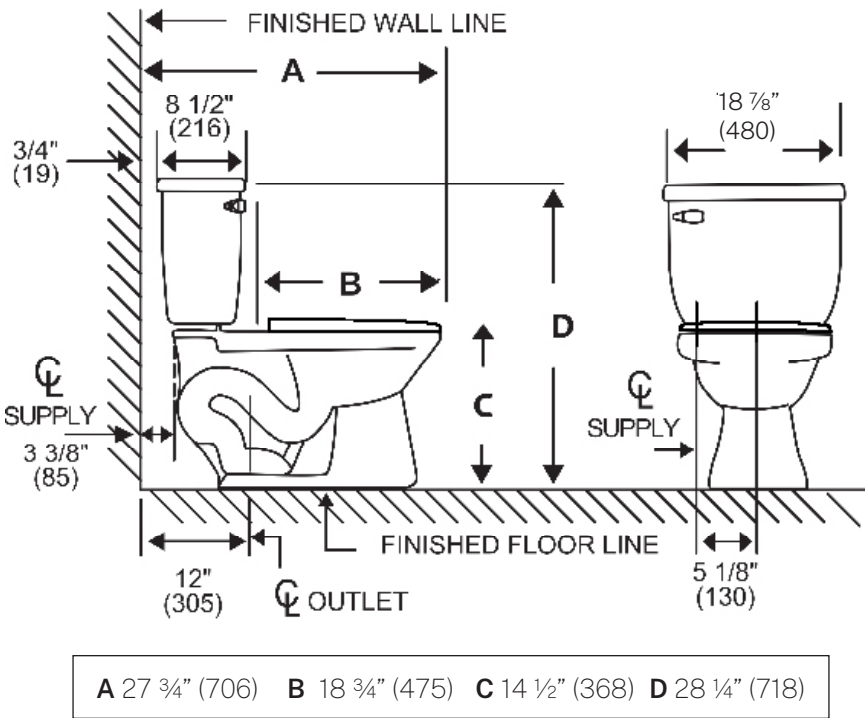

|                      |                 |
|----------------------|-----------------|
| Material             | Ceramic         |
| Rough-In             | 12" (305mm)     |
| Water Usage          | 1.28 gpf        |
| Water Pressure Range | 20/50/80 PSI    |
| Flush System         | 3" Single Flush |
| Water Surface Area   | ≥ 125 * 100 mm  |
| Trap Diameter        | ≥ 1 7/8"        |

|                 |                                            |
|-----------------|--------------------------------------------|
| Trap Seal       | ≥ 51 mm                                    |
| Shipping Weight | Tank: 32 lbs<br>Bowl: 42 lbs               |
| Warranty        | Ceramic: Lifetime<br>Tank fittings: 1 year |

Dimensions may vary (+) or (-) 1/4". Dimensions shown in parentheses are in millimeters: 25.4 mm = 1 inch. Note: Fixture dimensions are nominal and conform with dimension and performance requirements of ASME A112.19.2-2008/CSA B45.1-08 standards. PSI rating: 20 minimum to 80 maximum per ASME A112.19.2-2008/CSA B45.1-08 standards. Dimensions subject to change or cancellation without notice. Briggs is not responsible for the use of superceded or voided specification information.