

Astoria™

Two-piece Elongated Toilet UR201225WH



Features

- Vitreous China
- Boxed rim, jetted bowl
- 12” (305 mm) rough-in
- 1.28 gpf/4.8 Lpf
- Includes color matched plastic trip lever
- Sanitary bar on all bowls
- Toilet seat sold separately
- Limited Lifetime Warranty

Model

UR201225WH Combination:  
UR2012WH Astoria Elongated front bowl



UR2025WH Astoria 12” Rough-In tank & lid

Total shipping weight: 79 lbs (36 kg)  
UR2012WH shipping weight: 48 lbs (22 kg)  
UR2025WH shipping weight: 31 lbs (14 kg)

Alternate Tanks:

- UR2026WH Astoria 12” Rough-in, 1.28 gpf tank, RH trip lever
- UR2027WH Astoria 10” Rough-in, 1.28 gpf tank, LH trip lever
- UR2028WH Astoria 14” Rough-in, 1.28 gpf tank, LH trip lever
- UR2021WH Astoria 12” Rough-in, 1.6 gpf tank, LH trip lever

Colors

☐ White (130)

Codes & Standards

Meets or exceeds the following:


- ASME A112.19.2
  - CSA B45.1
  - IAPMO/cUPC
- 

Astoria™

Two-piece Elongated Toilet UR201225WH



Specifications

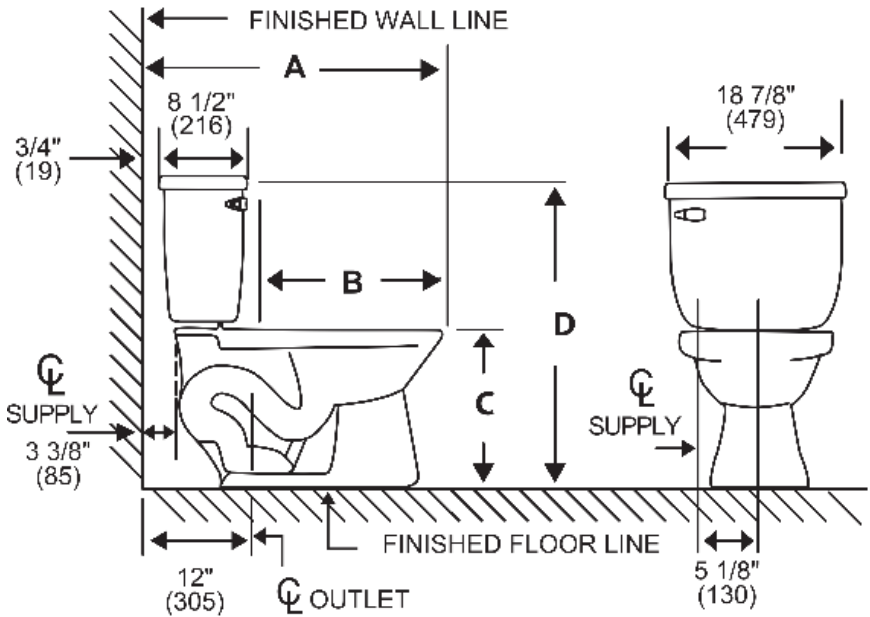

| UR201225WH |                                                             |   |               |
|------------|-------------------------------------------------------------|---|---------------|
| A          | Overall from wall: 30" (762)<br>Product only: 29 1/8" (740) | B | 18 1/2" (470) |
| C          | 14 3/4" (375)                                               | D | 29" (737)     |

|                      |                 |
|----------------------|-----------------|
| Material             | Ceramic         |
| Rough-In             | 12" (305mm)     |
| Water Usage          | 1.28 gpf        |
| Water Pressure Range | 20/50/80 PSI    |
| Flush System         | 2" Single Flush |
| Water Surface Area   | ≥ 125 * 100 mm  |
| Trap Diameter        | ≥ 1 7/8"        |

|                 |                                            |
|-----------------|--------------------------------------------|
| Trap Seal       | ≥ 51 mm                                    |
| Shipping Weight | 79 lbs (36 kg)                             |
| Warranty        | Ceramic: Lifetime<br>Tank fittings: 1 year |

Dimensions may vary (+) or (-) 1/4". Dimensions shown in parentheses are in millimeters: 25.4 mm = 1 inch. Note: Fixture dimensions are nominal and conform with dimension and performance requirements of ASME A112.19.2/CSA B45.1 standards. PSI rating: 20 minimum to 80 maximum per ASME A112.19.2/CSA B45.1 standards. Dimensions subject to change or cancellation without notice. Universal Rundle is not responsible for the use of superceded or voided specification information. Universal Rundle reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, visit [www.universalrundle.com](http://www.universalrundle.com)